

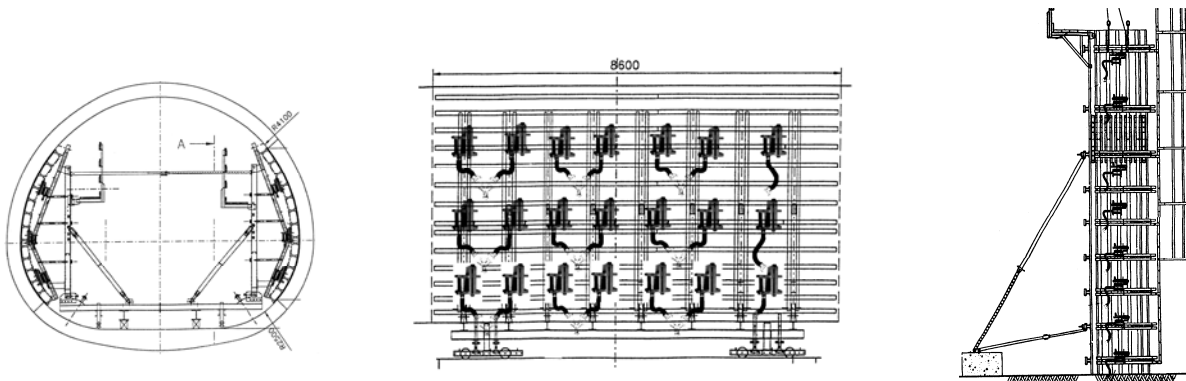


Pneumatic Formwork Vibrators

The pneumatic vibrators are light in weight; their frequency can be regulated stepless with minimum maintenance and minimum abrasion. The bearingless design guarantees a steady work rate even under hard conditions and continuous operation. The vibrators can be mounted at nearly all construction locations due to their different clamping options.



type	rotational speed upm	centrifugal force N	air consumption m ³ /min.	mass kg	base dimensions mm			external dimensions mm			
					a	b	s Ø	c	e	f	g
VR- 56K	17500	25000	1,05	3,5	124	55	12,5	140	80	70	76
VR- 57K	14000	31500	1,37	9,0	125	73	14,5	150	110	70	110

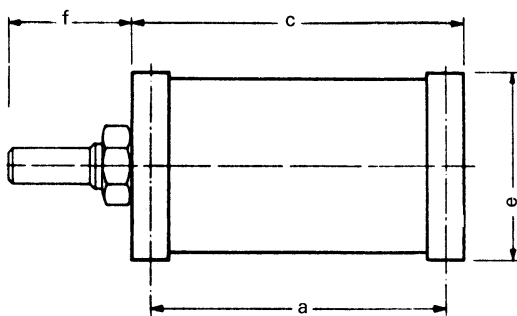

Above given technical performance data are non-binding average values. Subject to modifications and amendments.