


High frequency internal vibrators for aerated concrete

type		HJ-P 50
diameter Ø	mm	50
vibrations (200Hz)	1/min	12000
voltage	V	42
amperage	A	8
impact diameter Ø	cm	~ 55
weight	kg	8
needle length	mm	380

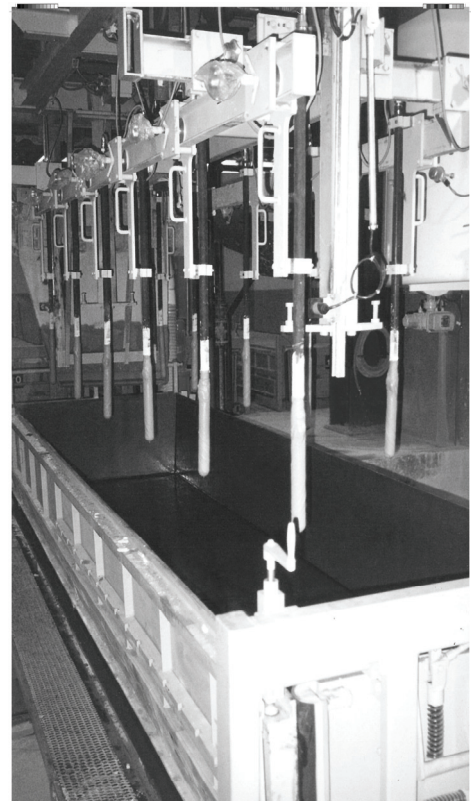

All high frequency internal vibrators HJ-P 50 for aerated concrete are equipped by default with

- 800 mm pneumatic hose* and
- 7 m connecting cable*

The high frequency internal vibrators HJ-P 50 are compatible for patented Mooser-aerated-concrete systems with adequate frequency converter and transformer.

*on request other length are possible.

The above given technical performance data are non-binding average values and are subject to modifications and amendments.